
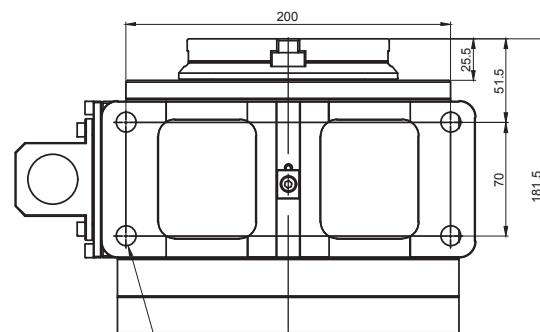
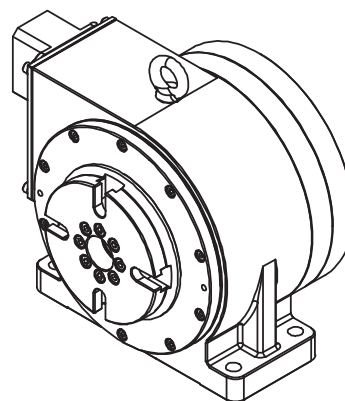


SDD-125-400-0.42

PRODUCT SPECIFICATION

Rotary table model	SDD-125-400-0.42
Diameter	Φ125mm
Center height	110
Disk height	/
Rated/Max.speed	200/400rpm
Disk surface runout	0.01
Disk center hole radial runout	0.005
Center hole diameter	Φ28
Drive type	Direct drive
The rated voltage	220V
Power output S1 100%	0.42kW
Power output S6 40%	1.68kW
Rated/Max.torque	20/112.8N.m
Rated/Max.current	2.7/13.6A
Cooling system	Natural cooling
Motor temperature sensor type	KTY84-130
Clamp type	Air clamp
Clamp air pressure	0.50-0.55MPa
Clamp torque	135N.m
Vibration velocity	0.2mm/s
Positioning accuracy	±10(20")
Repeating accuracy	±2(4")
minimum unit	0.001°
Load capacity	30kg
Weight	33±1.0kg
Match system	Mitsubishi, SIEMENS, FANUC
Degrees protection	IP66

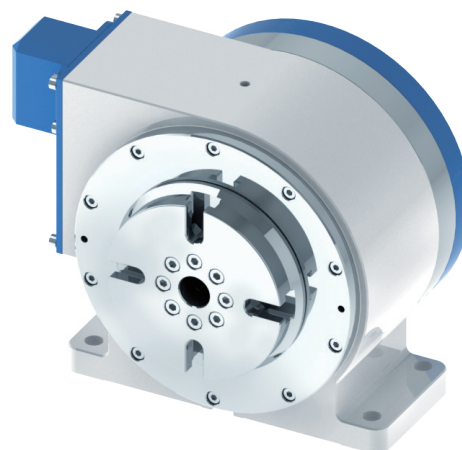

4- Ø12.5Through hole

